

S15639-1325PS

## Near infrared high sensitivity MPPC

The S15639-1325PS is a surface mount type MPPC designed for automotive LiDAR applications that achieves high sensitivity and low afterpulses.

### Features

- High photon detection efficiency: 9% ( $\lambda=905$  nm)
- Low afterpulse probability: 1% max.
- High gain:  $1.3 \times 10^6$
- Low crosstalk

### Applications

- Distance measurement
- LiDAR

### Structure

Parameter	Specification	Unit
Effective photosensitive area	1.3 × 1.1	mm
Pixel pitch	25	μm
Number of pixels	2120	-
Package	Surface mount type	-
Window material	Silicone resin	-
Refractive index of window material	1.57	-
Thermal resistance*1	409	°C/W

\*1: Between junction temperature and ambient temperature (typical example)

### Absolute maximum ratings

Parameter	Symbol	Condition	Value	Unit
Operating temperature	Topr	No dew condensation*2	-40 to +105	°C
Storage temperature	Tstg	No dew condensation*2	-40 to +125	°C
Soldering temperature	Tsol		260 (3 times)*3	°C
Output current (DC)	I <sub>max</sub>	Average value	1	mA

\*2: When there is a temperature difference between a product and the surrounding area in high humidity environments, dew condensation may occur on the product surface. Dew condensation on the product may cause deterioration in characteristics and reliability.

\*3: Reflow soldering, JEDEC J-STD-020 MSL 2a, see P.7

Note: Exceeding the absolute maximum ratings even momentarily may cause a drop in product quality. Always be sure to use the product within the absolute maximum ratings.

**Electrical and optical characteristics (Ta=25 °C)**

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Spectral response range	$\lambda$		-	400 to 1000	-	nm
Peak sensitivity wavelength	$\lambda_p$		-	660	-	nm
Photon detection efficiency*4	PDE	$\lambda=\lambda_p, V_R=V_{BR} + 10\text{ V}$	-	30	-	%
		$\lambda=905\text{ nm}, V_R=V_{BR} + 10\text{ V}$	-	7.5	-	
		$\lambda=905\text{ nm}, V_R=V_{BR} + 14\text{ V}$ *5	-	9	-	
Breakdown voltage	$V_{BR}$		37	42	47	V
Recommended operating voltage*6	$V_{op}$	*5	-	$V_{BR} + 10\text{ V}$	$V_{BR} + 14\text{ V}$	V
$V_{op}$ variation in a reel*7	-		-	$\pm 0.25$	-	V
Dark current	$I_D$		-	0.2	0.45	$\mu\text{A}$
Dark count rate*8	DCR	$V_R=V_{BR} + 10\text{ V}$	-	0.7	2.0	Mcps
Crosstalk probability		$V_R=V_{BR} + 10\text{ V}$	-	4	-	%
Afterpulse probability		$V_R=V_{BR} + 10\text{ V}$	-	-	1	%
Recovery time	treocr	$V_R=V_{BR} + 10\text{ V}$	-	46	-	ns
Terminal capacitance	$C_t$	$V_R=V_{BR} + 10\text{ V}, f=100\text{ kHz}$	-	42	-	pF
Gain	M	$V_R=V_{BR} + 10\text{ V}$	-	$1.3 \times 10^6$	-	-
Temperature coefficient of $V_{op}$	$\Delta T V_{op}$		-	81	-	mV/°C

\*4: Photon detection efficiency does not include crosstalk and afterpulses.


\*5: When using  $V_R$  more than  $V_{BR} + 10\text{ V}$ , provide a protective resistance over 5 k $\Omega$  or an appropriate current limiting circuit.

\*6: Refer to the data attached to each product.

\*7: The center value of the recommended operating voltage ( $V_{op}$ ) of products in the reel is indicated on the label attached to the reel.


\*8: Threshold=0.5 p.e.

**Photon detection efficiency vs. wavelength (typical example)**

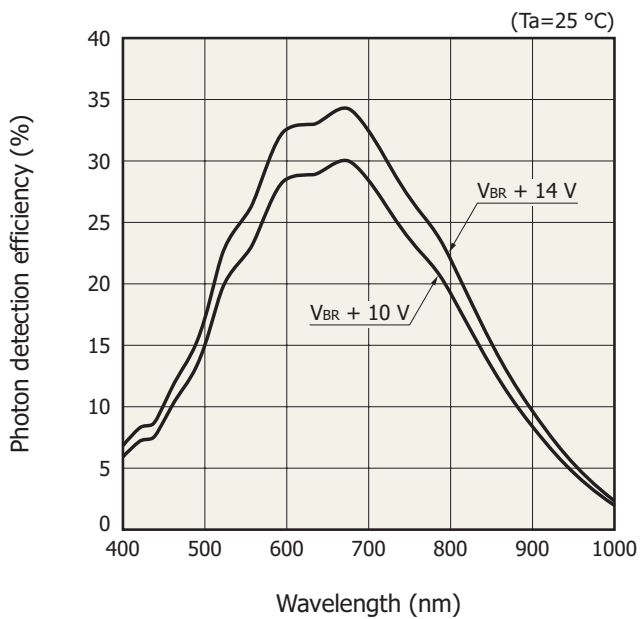


KAPDB0624EA


Dark current vs. overvoltage (typical example)

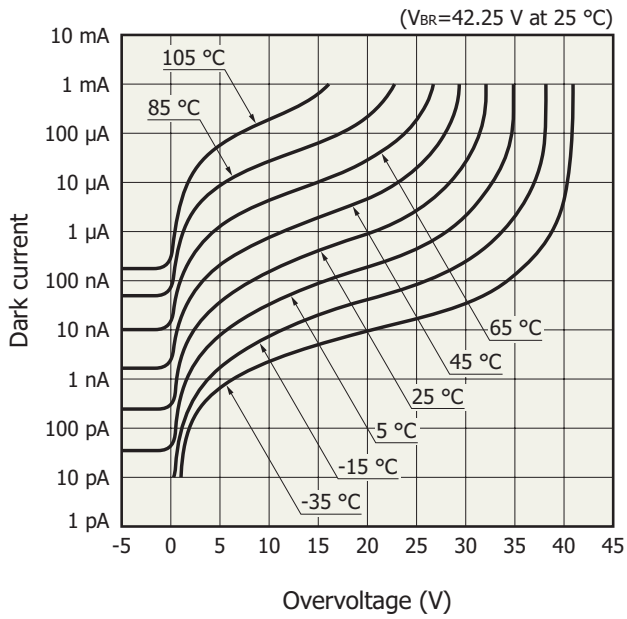


Dark current vs. reverse voltage (typical example)

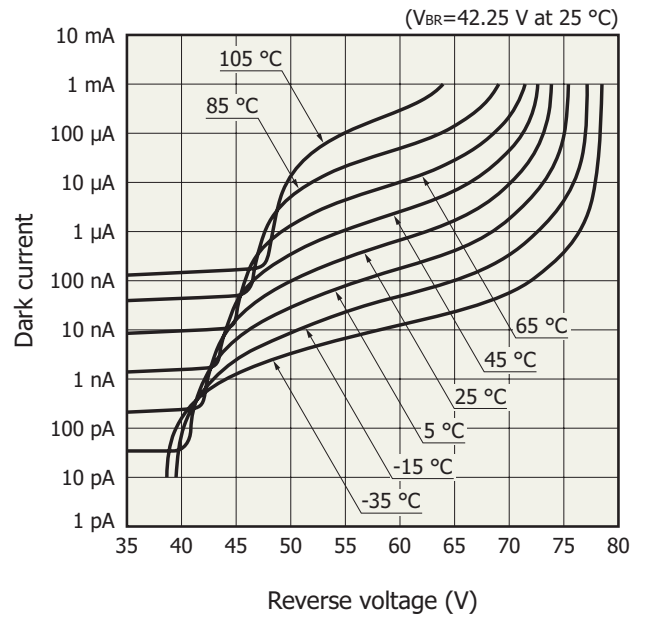


Gain, crosstalk probability, photon detection efficiency vs. overvoltage (typical example)

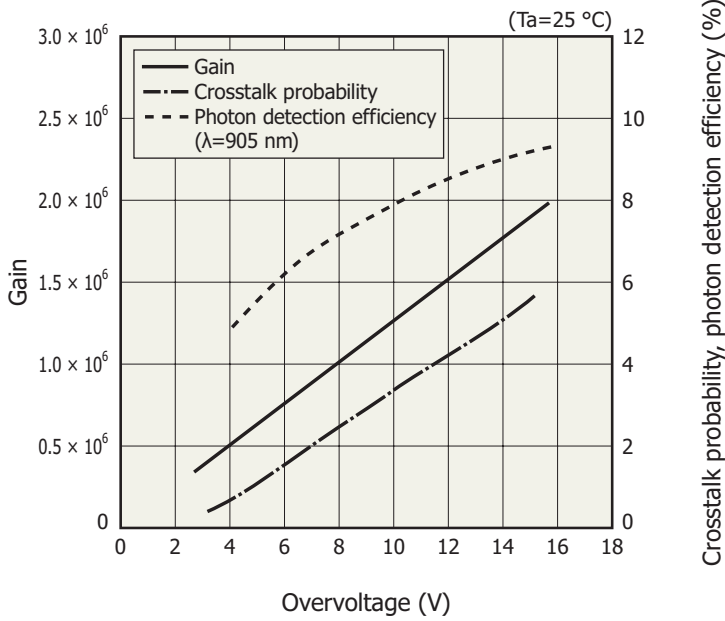

**Pulse waveform**

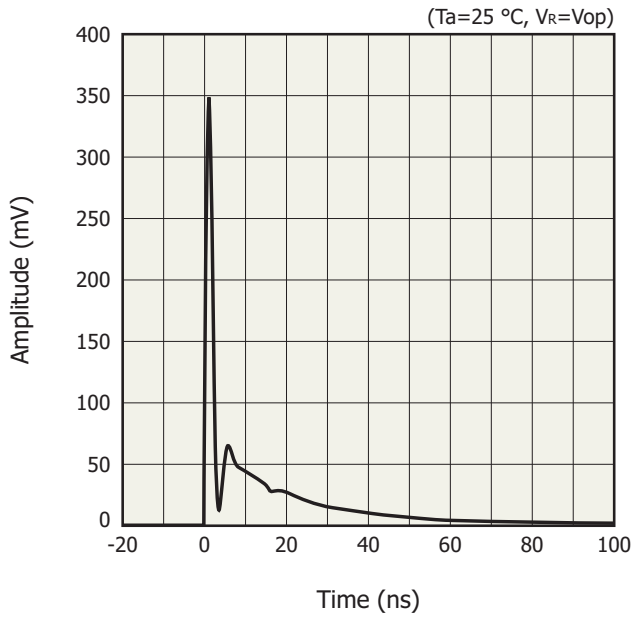


■ Measurement circuit

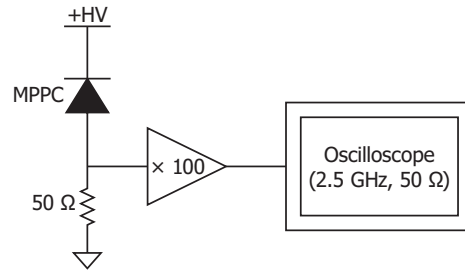

KAPDC0135EA

KAPDB0626EA


**Linearity (typical example)**

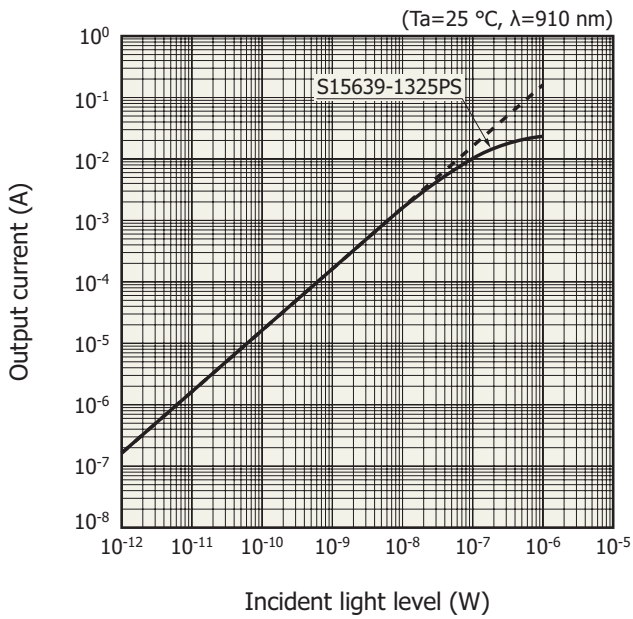

\* This graph does not include the reduction of linearity due to heat.




KAPDB0628EA

**Afterpulse probability vs. overvoltage (typical example)**

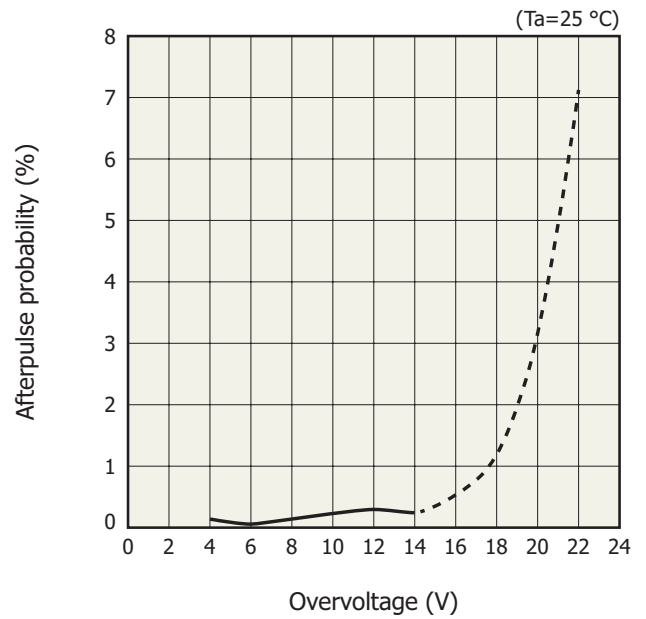

KAPDB0631EA

Dimensional outline (unit: mm)

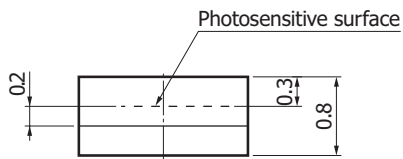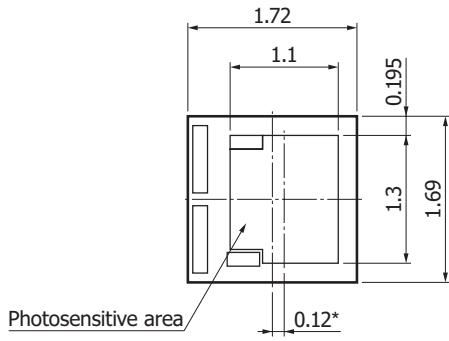


Anode ① —|— ② Cathode  
 ③ ④ NC

Tolerance unless otherwise noted:  $\pm 0.1$   
 \* Distance from package center to photosensitive area center

KAPDA0223EA

Recommended land pattern (unit: mm)




KAPDA0224EA

**Standard packing specifications**

■ Reel (conforms to JEITA ET-7200)

Outer diameter	Hub diameter	Tape width	Material	Electrostatic characteristics
180 mm	60 mm	8 mm	PS	Conductive

■ Embossed tape (unit: mm, material: PS, conductive)

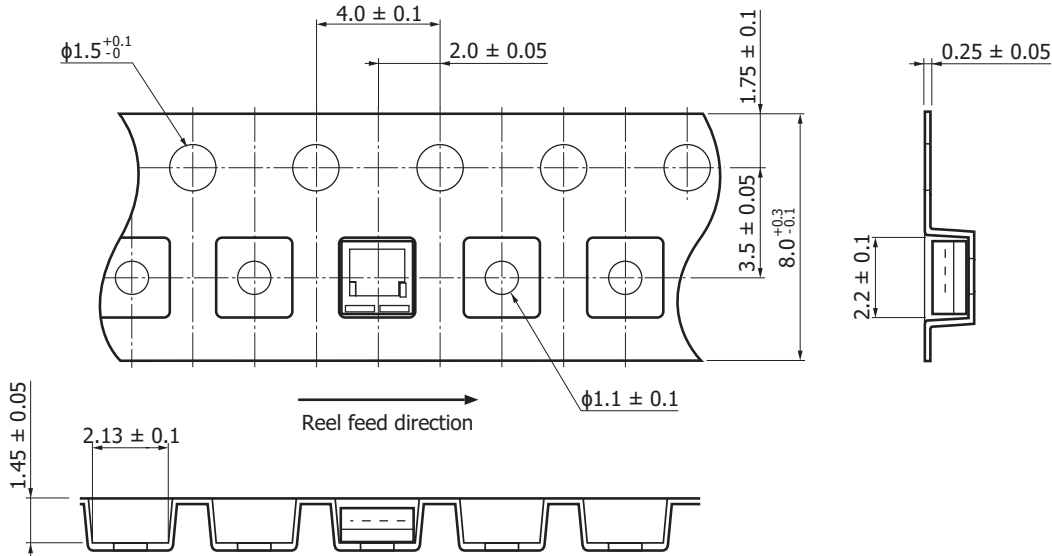

KAPDC0134EA

■ Packing quantity

1000 pcs/reel


■ Packing type

Reel and desiccant in moisture-proof packaging (vacuum-sealed)

**Precaution**

Overcurrent may flow depending on ambient temperature, incident light level, heat dissipation status, and applied bias. If an overcurrent flows, the element temperature may rise, causing damage to the product.

## Recommended reflow soldering conditions

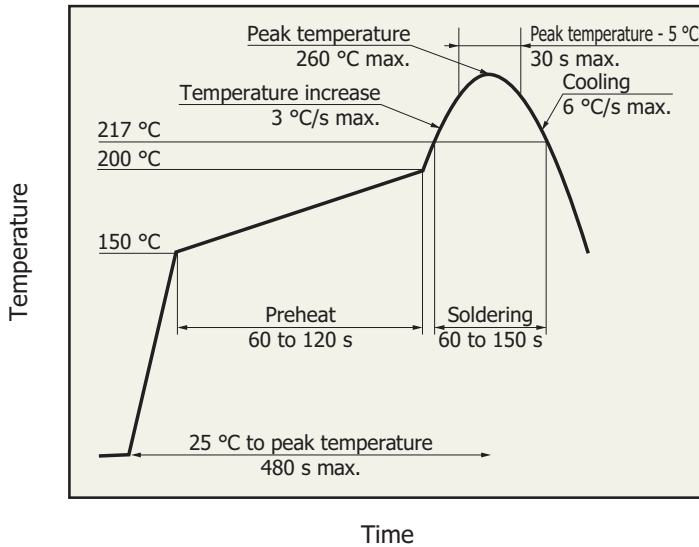

KSPD80419EA

- After unpacking, store the device in an environment at a temperature range of 5 to 30 °C and a humidity of 60% or less, and perform reflow soldering within 4 weeks.
- The effect that the product receives during reflow soldering varies depending on the circuit board and reflow oven that are used. When you set reflow soldering conditions, check that problems do not occur in the product by testing out the conditions in advance.

## Baking

If more than 3 months have passed in the unopened state, or storage conditions are exceeded after opening the package, baking is required to remove moisture before reflow soldering. For the baking, refer to the precautions "Surface mount type products."

### Recommended baking conditions

Temperature: 120 °C, 3 hours, up to twice

Note: Before setting the baking conditions, perform experiments to confirm that no problems occur with the product.

## Related information

[www.hamamatsu.com/sp/ssd/doc\\_en.html](http://www.hamamatsu.com/sp/ssd/doc_en.html)

### Precautions

- Disclaimer
- Metal, ceramic, plastic package products
- Surface mount type products

### Technical information

- MPPC / Technical note

MPPC is a registered trademark of Hamamatsu Photonics K.K. (China, EU, Japan, Korea, Switzerland, UK, U.S.A.)

Information described in this material is current as of November 2023.

Product specifications are subject to change without prior notice due to improvements or other reasons. This document has been carefully prepared and the information contained is believed to be accurate. In rare cases, however, there may be inaccuracies such as text errors. Before using these products, always contact us for the delivery specification sheet to check the latest specifications.

The product warranty is valid for one year after delivery and is limited to product repair or replacement for defects discovered and reported to us within that one year period. However, even if within the warranty period we accept absolutely no liability for any loss caused by natural disasters or improper product use. Copying or reprinting the contents described in this material in whole or in part is prohibited without our prior permission.

# HAMAMATSU

[www.hamamatsu.com](http://www.hamamatsu.com)

HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1 Ichino-cho, Higashi-ku, Hamamatsu City, 435-8558 Japan, Telephone: (81)53-434-3311, Fax: (81)53-434-5184

U.S.A.: HAMAMATSU CORPORATION: 360 Foothill Road, Bridgewater, NJ 08807, U.S.A., Telephone: (1)908-231-0960, Fax: (1)908-231-1218

Germany: HAMAMATSU PHOTONICS DEUTSCHLAND GMBH: Arzbergerstr. 10, 82211 Herrsching am Ammersee, Germany, Telephone: (49)8152-375-0, Fax: (49)8152-265-8 E-mail: [info@hamamatsu.de](mailto:info@hamamatsu.de)

France: HAMAMATSU PHOTONICS FRANCE S.A.R.L.: 19 Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: (33)1 69 53 71 00, Fax: (33)1 69 53 71 10 E-mail: [infos@hamamatsu.fr](mailto:infos@hamamatsu.fr)

United Kingdom: HAMAMATSU PHOTONICS UK LIMITED: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire, AL7 1BW, UK, Telephone: (44)1707-294888, Fax: (44)1707-325777 E-mail: [info@hamamatsu.co.uk](mailto:info@hamamatsu.co.uk)

North Europe: HAMAMATSU PHOTONICS NORDEN AB: Torshamnsgatan 35, 16440 Kista, Sweden, Telephone: (46)8-509-031-00, Fax: (46)8-509-031-01 E-mail: [info@hamamatsu.se](mailto:info@hamamatsu.se)

Italy: HAMAMATSU PHOTONICS ITALIA S.R.L.: Strada della Moia, 1 int. 6 20044 Arese (Milano), Italy, Telephone: (39)02-93 58 17 33, Fax: (39)02-93 58 17 41 E-mail: [info@hamamatsu.it](mailto:info@hamamatsu.it)

China: HAMAMATSU PHOTONICS (CHINA) CO., LTD.: 1201, Tower B, Jiaming Center, 27 Dongsanhuan Beilu, Chaoyang District, 100020 Beijing, P.R. China, Telephone: (86)10-6586-6006, Fax: (86)10-6586-2866 E-mail: [hpc@hamamatsu.com.cn](mailto:hpc@hamamatsu.com.cn)

Taiwan: HAMAMATSU PHOTONICS TAIWAN CO., LTD.: 13F-1, No.101, Section 2, Gongdao 5th Road, East Dist., Hsinchu City, 300046, Taiwan(R.O.C) Telephone: (886)3-659-0080, Fax: (886)3-659-0081 E-mail: [info@hamamatsu.com.tw](mailto:info@hamamatsu.com.tw)